

- Suitable for product with tray, canned group packing, ex. :
Drinks, food, soda, water, can, bottle, glass, milk, healthy drinks,
PET bottle, tetra... etc., or other related products.



SA-117

Automatic Sleeve Wrapper



TY-136

Servo Motor Sleeve Wrapper



Model	SA-117 (90°)	SA-117-1 (90°)	SA-117-V	TY-136
Machine (L x W x H) mm	1710 x 2430 x 1710	2100 x 2630 x 2110	1830 x 1630 x 1710	2950 x 1900 x 1750
Product Range (L x W x H) mm	(100-300) x (200-350) x (50-170)	(100-450) x (200-600) x (50-170)	(200-350) x (200-350) x (50-170)	Customized, upon request
Speed	1~16 packs/min	1~12 packs/min	1~16 packs/min	1~40 packs/min
KW	2KW	2KW	2KW	10KW
Power	220V or 380V, 50/60Hz			

* Min. product weight for SA-117-V: 2kg.

Passion & Innovation of Package

TAYIYEH Since 1977
TAYI YEH MACHINERY CO., LTD.

No.191, Sec. 3, Yanping Rd., Tounan Township,
Yunlin County, 63048, Taiwan.
Tel : +886-5-597-1156 Fax : +886-5-597-1159
Email: info@taiyieh.com



www.taiyieh.com

TAYIYEH
TAYI YEH MACHINERY CO., LTD.



Shrink Packaging Machines Manufacturer

| L Sealer | Sleeve Wrapper | Shrink Tunnel

Sleeve Wrapper

- Suitable for various canned food, beverage,
bottle drink without tray.



SA-106

Counting & Collating Packaging Machine



Model	SA-116 (90°)	SA-106-1	SA-106-2
Machine (L x W x H) mm	3850 x 2500 x 1900	5170 x 1450 x 2050	5170 x 2350 x 2050
Product Range (L x W x H) mm	Customized, upon request	Customized, upon request	Customized, upon request
Speed	1~14 packs/min	1~22 packs/min	1~44 packs/min
KW	24KW	25KW	50KW
Power	220V or 380V, 50/60Hz		

* Working height for SA-106-1 & SA-106-2: 900mm. * SA-116, SA-106-1, SA-106-2: Shrink Tunnel included.

* Packaging speed will be differ from film thickness, product size and operator. * Clean & Filter compressed air is provided by buyer.

L Sealer

User Friendly Operation / Efficient Package Performance

► Applicable packaging products :

Cosmetics, shampoo, book, magazine, notebook, stationery, toys, food, vegetable, grocery, kitchenware, daily product, box, bottle, can, drinks, electronics, paper roll, tissue, wire, metal parts, tin, jar... etc.

Product Applications



TY-7112



TY-7315H

Servo Motor
Touch Panel



TY-701-3000L

Suitable for long shape product.
Min. Product length: 600mm



TY-706

High Speed Side Sealer
Servo Motor
Touch Panel



Shrink Tunnel

Circulation Heating / Flexible Application

PVC

Polyvinyl
Chloride

POF

Polyolefin

PE

Polyethylene

Product Applications



TY-601P

Semi-Auto L Sealer
P: Pneumatic Sealing (Optional Device)




SA-316 POF



SA-316 POF-L



SA-318 PE

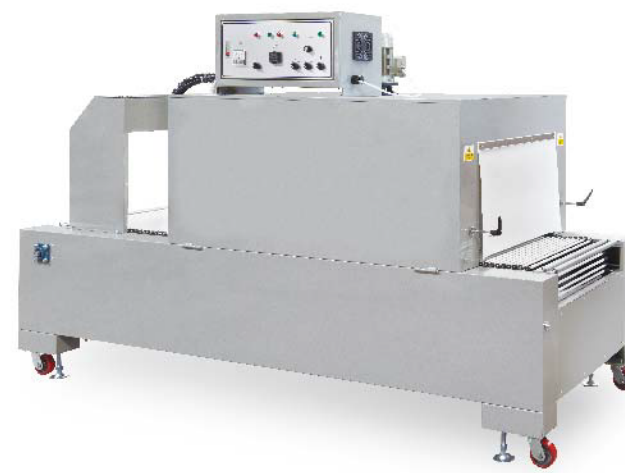

Model	TY-7008	TY-7112	TY-7212	TY-7315	TY-7315H	TY-701-300H	TY-701-3000L	TY-706-150	TY-601P
Machine (L x W x H) mm	1600 x 810 x 1550	2100 x 930 x 1580	2560 x 1130 x 1580	2100 x 930 x 1580	2400 x 1130 x 1630	3030 x 1750 x 1650	4500 x 980 x 1580	2930 x 1900 x 1530	1750 x 700 x 1300
Product Range (L x W x H) mm	(100-300) x (40-230) x (5-80)	(100-500) x (60-330) x (5-120)	(120-700) x (200-500) x (5-120)	(100-450) x (50-300) x (5-150)	(100-450) x (50-300) x (5-150)	(250-600) x (200-400) x (120-300)	(600-3000) x (50-200) x (20-120)	(120-800) x (60-350) x (5-150)	(100-500) x (40-300) x (5-100)
Speed	1~25 packs/min	1~25 packs/min	1~20 packs/min	1~45 packs/min	1~45 packs/min	1~15 packs/min	1~12 packs/min	30~80 packs/min	1~12 packs/min
KW	2.2KW	2.6KW	3.0KW	2.5KW	2.5KW	3.0KW	3.3KW	15KW	4.4KW
Power	220V/1P or 380V/3P, 50/60Hz								

* Power Supply: 220V, 60Hz, 1P (other power supply upon request). * Working Height: 750mm (upon request).

* Closing conveyor (S) can be added for product length less than 100mm (min. length: 30mm).

* Packaging speed will be differ from film thickness, product size and operator. * Clean & Filter compressed air is provided by buyer.

* Other optional functions and customized machine available upon request.

Model	SA-313 POF	SA-316 POF	SA-317 POF	SA-318 POF	SA-319 POF	SA-317 PE	SA-318 PE	SA-319 PE	SA-321 PE
Machine (L x W x H) mm	1265 x 720 x 1220	1865 x 720 x 1450	1865 x 820 x 1500	1865 x 880 x 1650	2400 x 1060 x 1690	2800 x 960 x 1700	2800 x 1080 x 1800	2800 x 1160 x 1800	3600 x 1440 x 1900
Chamber size (L x W x H) mm	800 x 400 x 200	1200 x 400 x 250	1200 x 500 x 300	1200 x 600 x 350	1500 x 700 x 400	1500 x 500 x 350	1500 x 600 x 450	1500 x 700 x 450	2000 x 900 x 500
Product Range (W x H) mm	300 x 130	300 x 170	390 x 220	470 x 250	550 x 300	350 x 250	420 x 300	490 x 300	630 x 350
KW	9KW	14KW	19KW	21KW	27KW	20KW	28KW	30KW	44KW
M/min	0~7	0~8	0~8	0~8	0~8	0~8	0~8	0~8	0~8
Power	3P, 220/3P, 380V/3P, 380V 4W or upon request.								

* Customized machine available upon request.

• Specifications subject to change without prior notice.

Sleeve Wrapper

- Suitable for various canned food, beverage, bottle drink without tray.

Product Applications



SA-106

Counting & Collating Packaging Machine



Model	SA-116 (90°)	SA-106-1	SA-106-2
Machine (L x W x H) mm	3850 x 2500 x 1900	5170 x 1450 x 2050	5170 x 2350 x 2050
Product Range (L x W x H) mm	Customized, upon request	Customized, upon request	Customized, upon request
Speed	1~14 packs/min	1~22 packs/min	1~44 packs/min
KW	24KW	25KW	50KW
Power	220V or 380V, 50/60Hz		

* Working height for SA-106-1 & SA-106-2: 900mm. * SA-116, SA-106-1, SA-106-2: Shrink Tunnel Included.

* Packaging speed will be differ from film thickness, product size and operator. * Clean & Filter compressed air is provided by buyer.

Product Applications

- Suitable for product with tray, canned group packing, ex. :
Drinks, food, soda, water, can, bottle, glass, milk, healthy drinks, PET bottle, tetra... etc., or other related products.



SA-117

Automatic Sleeve Wrapper



TY-136

Servo Motor Sleeve Wrapper



Model	SA-117 (90°)	SA-117-1 (90°)	SA-117-V	TY-136
Machine (L x W x H) mm	1710 x 2430 x 1710	2100 x 2630 x 2110	1830 x 1630 x 1710	2950 x 1900 x 1750
Product Range (L x W x H) mm	(100-300) x (200-350) x (50-170)	(100-450) x (200-600) x (50-170)	(200-350) x (200-350) x (50-170)	Customized, upon request
Speed	1~16 packs/min	1~12 packs/min	1~16 packs/min	1~40 packs/min
KW	2KW	2KW	2KW	10KW
Power	220V or 380V, 50/60Hz			

* Min. product weight for SA-117-V: 2kg.